


WALL BACKING SCHEDULE

NOTE: SOME OF THE WALL BACKING REQUIREMENTS LISTED BELOW MAY APPLY TO THE PROJECT. SEE GENERAL CONDITIONS SCHEDULES (WB8 & WB9) FOR DETAILS.

- WB1 WALL BACKING FOR HAND SINKS TO BEGIN AT 30" AFF UP TO 55" AFF.
- WB2 WALL BACKING FOR DOUBLE WALL SHELVES TO BEGIN AT 48" AFF UP TO 84" AFF.
- WB3 WALL BACKING FOR SALAMANDER BROILER TO BEGIN AT 48" AFF UP TO 78" AFF.
- WB4 WALL BACKING FOR WATER FILTRATION SYSTEMS TO BEGIN AT 84" AFF UP TO 90" AFF.
- WB5 WALL BACKING FOR CURING CASE TO BEGIN AT 72" AFF UP TO 120" AFF.
- WB6 WALL BACKING FOR WALL MOUNTED PRE-RINSE SPRAY FAUCETS TO BEGIN AT 50" AFF UP TO 80" AFF.
- WB7 WALL BACKING FOR SERVICE FAUCET TO BEGIN AT 36" AFF UP TO 54" AFF.
- WB8 WALL BACKING FOR FIRE PROTECTION SYSTEMS TO BEGIN AT FINISHED CEILING DOWN 30" AFF.

SPECIAL CONDITIONS LEGEND

- WALL BACKING DESIGNATION
- ▨ FLOOR DEPRESSION DESIGNATION
- ▧ EXHAUST DUCT COLLAR DESIGNATION
- ▩ SUPPLY AIR COLLAR DESIGNATION
- SODA/BEER SYSTEM CHASE LOCATION

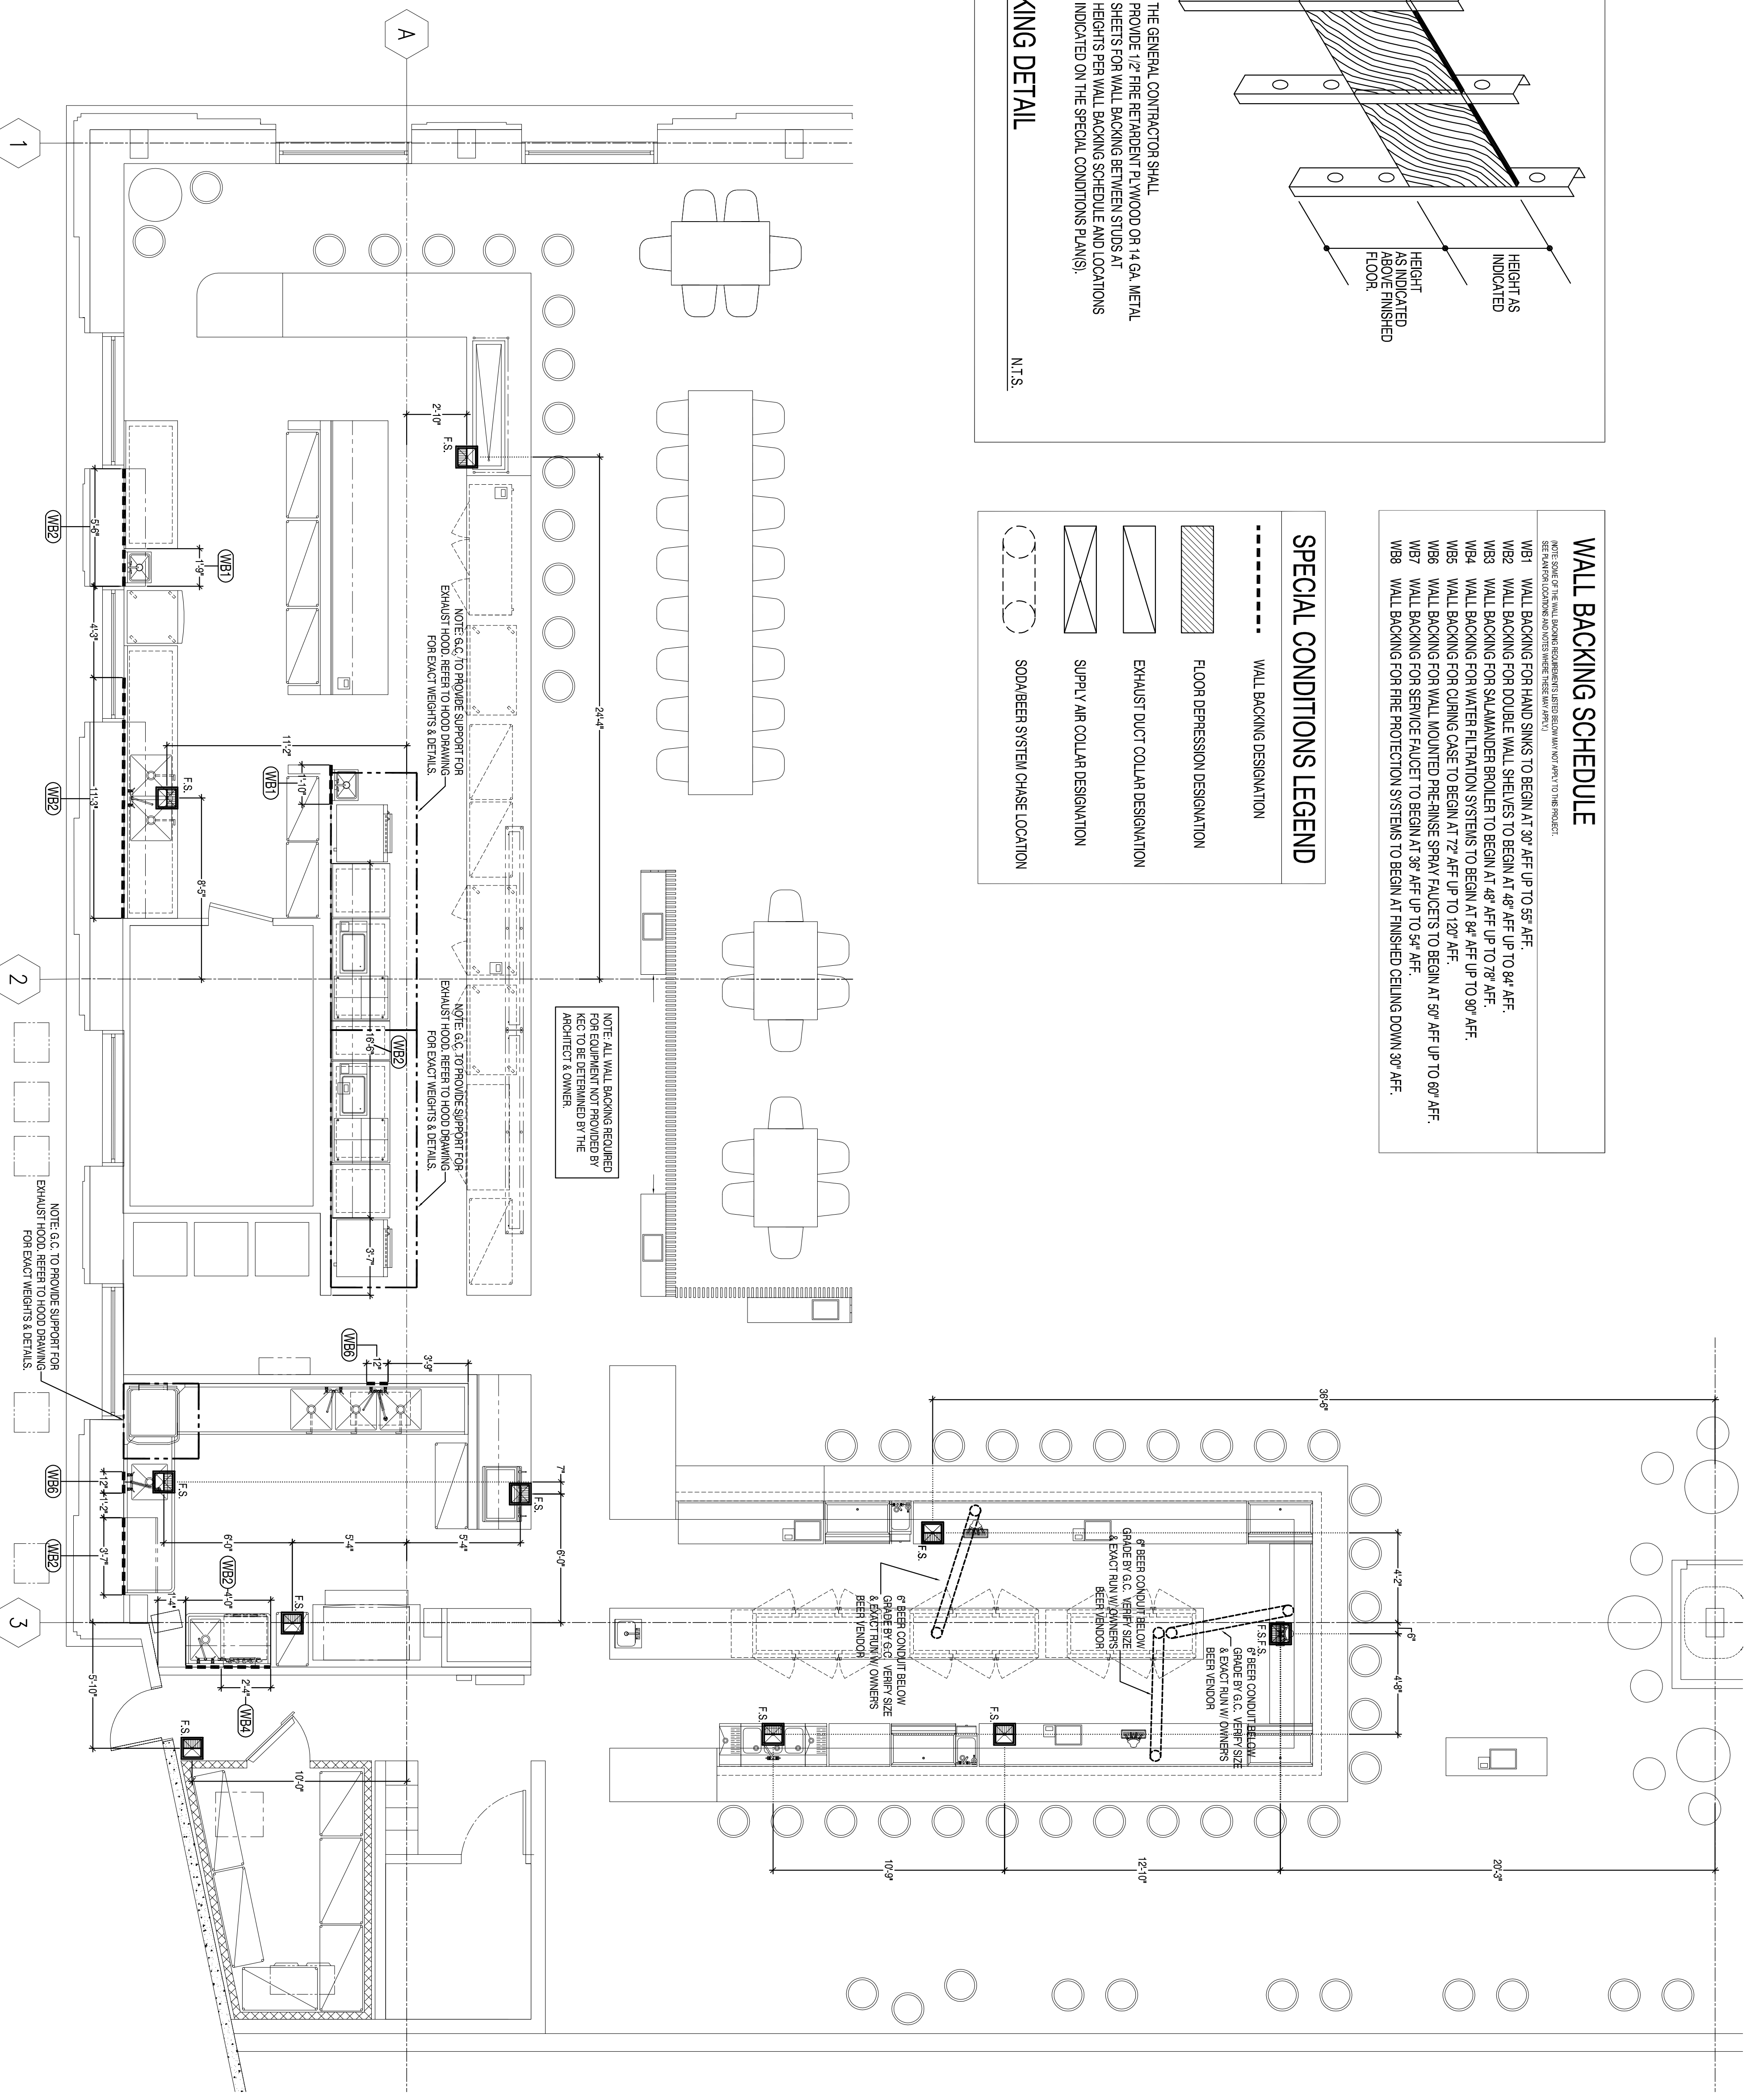

1200 Seventh Street
San Francisco, CA 94107
P - 415.626.5811
F - 415.626.4574
t@markconomy.com

Foodservice Design, Equipment and Supplies.

Project Title
WAIHEKE YACHT CLUB
RESTAURANT & BAR
PIER 29 - AMERICA'S CUP VILLAGE

Rev. No.	Date	Issue Notes
06-06-13		

Drawn By: KR
 Reviewed By: DO
 Project Engineer: JH
 Drawing Title: FOOD SERVICE SPECIAL CONDITIONS PLAN
 Scale: 1/4" = 1'-0"
 Sheet No.: FS-7.0